

Ellie Shelf Fitting Guide

Your Ellie Shelf comes with everything you need to fit it to an angled wall. It is expected that this will be a boat wall and so will wooden, but wall plugs are included if you wish to fit it to a masonry wall. For metal walls you may require additional fixings, please get in touch for advice if you require any assistance.

You will need

- A pencil
- A straight edge
- A Pozi head screwdriver


(For a masonry wall you will need a drill and masonry bit)

This kit contains

- One Ellie Shelf
- Two D rings
- Two lengths of chain
- Four S hooks
- One catch plate (rectangle with two countersunk holes)
- Wall plugs and screws (40mm)
- Wood screws (16mm)

Ellie Shelf Small (Medium/Large)

- Mark a horizontal line 40mm above where you want the base of the shelf to be when open. The length (A) is 250mm long for the small shelf (550mm/850mm Medium/Large) and centred on where you want the shelf centred
 - o This is the line marks the position of the screws for the hinge
- Mark a point 176mm above the centre of this line and at a distance of (B) 190mm for the small shelf (340mm/490mm Medium/Large) either side of this
 - o This is the 3 X on the diagram and marks the centres for the D rings (either side) and the catch plate (in the centre)

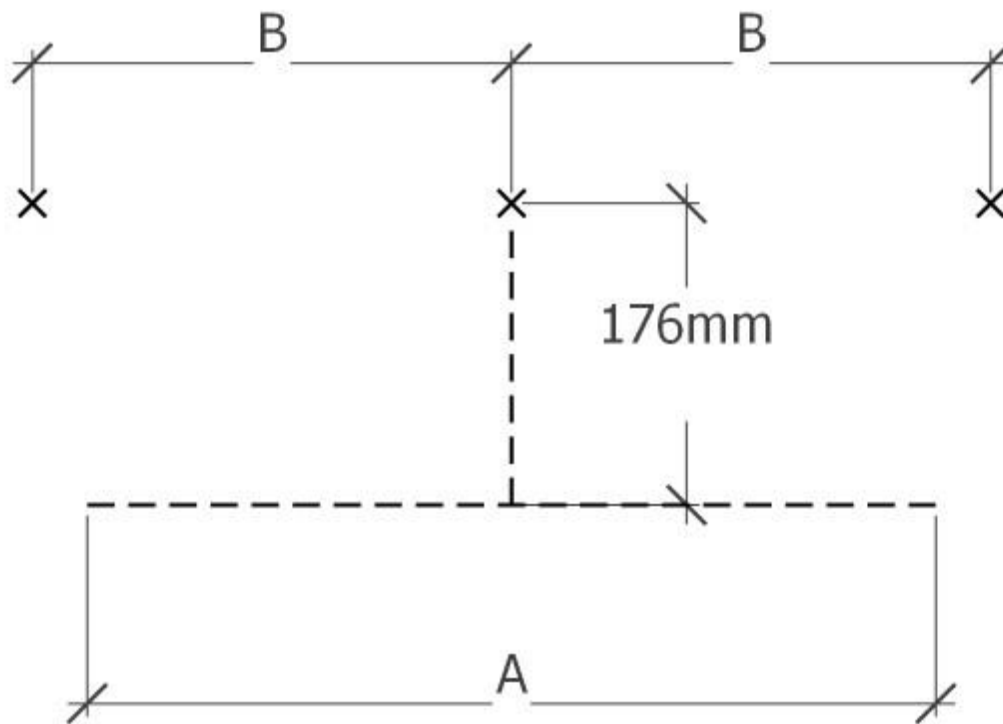

- Hold the shelf up with the hinge holes aligned with the long horizontal line. You will fix the wood screws (16mm) in along this line. You may find it easier to mark the position of one or two holes and then either pre drill or pre screw. Then when you offer it up it will be easier to put a screw straight in. Put in all of the wood screws (16mm) required for the hinge, i.e. one for each hole
- Attach the d rings to the wall, centred on the outer two marks, with the wood screws (16mm). Fix the catch plate centred on the mark with the wood screws (16mm)
- Attach the chains with the s hooks to the D rings. By altering the length of the chain you can adjust the angle the shelf sits at

Tips

- On a boat, instead of a spirit level you can measure from the ceiling, gunwale or other horizontal point



Cluett
Carpentry

Cluett Carpentry Ltd,
Unit3, Roffey Hall Farm,
CM17 0NS

Tel: 0333 433 0840
Web: cluettcarpentry.com
Shop: shop.cluettcarpentry.com

- Take care there are no cables or pipes behind where you are fixing/drilling
- If you have sturdy wire cutters or pliers you can trim the excess chain if desired
- For a masonry wall pre drill all fixing points with a masonry bit, fit wall plugs and use 40mm screws for fixing.